

ARTCOOL Slim INVERTER V

9K
A09LL


12K
A12LL



P 10 P 12 P 14 P 15 P 20 P 22 P 24 P 27 P 34

Unit				9K		12K	
Model Outdoor Unit				A09LL	ASUW096NRR0	A12LL	ASUW126NRR0
Model Indoor Unit				A09LL	ASNW096NRR0	A12LL	ASNW126NRR0
Indoor Unit							
Capacity	Cooling	Min	W	890	890		
		Rated	W	2500	3500		
		Max	W	3700	4040		
	Heating	Min	W	890	890		
		Rated	W	3200	4000		
		Max	W	5000	6000		
Heating -7°C	Rated	W	3200	3800			
	Rated	W	580	940			
	Rated	W	780	1000			
Power Input	Cooling	Rated	W/W	4.3	3.72		
		Rated	W	6.7	6.4		
		Rated	W	2.5	3.5		
EER	S.E.E.R.	Rated	W/W	4.1	4.0		
		Rated	W	4.0	4.0		
		Rated	W	2.7	3.5		
P design C	COP	Rated	Kw	A++	A++		
		Rated	W	A+	A+		
		Rated	W	142	190		
Annual Energy Consumption	Cooling	Rated	kWh	1120	1350		
		Rated	kWh	19	19		
		Rated	kWh	24	24		
Sound Pressure	Cooling	Sleep	dB(A)	33	33		
		Low	dB(A)	39	39		
		Medium	dB(A)	24	24		
	Heating	Low	dB(A)	24	24		
		Medium	dB(A)	33	33		
		High	dB(A)	39	39		
Sound Power	Cooling	High	dB(A)	60	60		
		High	dB(A)	60	60		
		High	dB(A)	60	60		
Air Flow Rate	Cooling	Sleep	m ³ /min	3.5	3.5		
		Low	m ³ /min	5.5	5.5		
		Medium	m ³ /min	7	7		
	Heating	High	m ³ /min	8	8		
		Max (Power)	m ³ /min	14	14		
		Low	m ³ /min	6	6		
Dehumidification Rate	Running Current	Medium	m ³ /min	7.5	7.5		
		High	m ³ /min	8.5	8.5		
		Rated	l/h	1.1	1.3		
Starting Current	Cooling	Rated	A	3.5	4.1		
		Max	A	6.0	6.0		
		Rated	A	4	4.4		
Power Supply	Heating	Max	A	7.0	7.0		
		Rated	A	3.5	4.1		
		Rated	A	4	4.4		
Circuit Breaker	Power Supply Cable	Rated	V / Hz	1 / 220-240 / 50	1 / 220-240 / 50		
		Rated	A	15	15		
		Rated	N x mm ²	31.0	31.0		
Power & Transmission Cable	Dimension	Rated	N x mm ²	41.0 (Including Earth)	41.0 (Including Earth)		
		Rated	mm	957305177	957305177		
		Rated	kg	11.5	11.5		
Fan Motor Output	Outdoor Unit	Rated	W	20	20		
		Rated	W	20	20		
		Rated	W	20	20		
Operation Range	Cooling	Min~Max	°CDB	-10~48	-10~48		
		Min~Max	°CWB	-15~24	-15~24		
		High	dB(A)	45	45		
Sound Pressure	Heating	High	dB(A)	45	45		
		High	dB(A)	45	45		
		High	dB(A)	65	65		
Sound Power	Cooling	High	dB(A)	65	65		
		High	dB(A)	33	33		
		High	dB(A)	33	33		
Air Flow Rate	Piping	Min	m	2	2		
		Max	m	20	20		
		Max	m	10	10		
Piping Connection	Liquid	Min	m	2	2		
		Max	m	20	20		
		Max	m	10	10		
	Gas	OD(Outside)	mm	6.35	6.35		
		OD(Outside)	inch	(1/4)	(1/4)		
		OD(Outside)	mm	9.52	9.52		
Drain	OD(Outside)	inch	(3/8)	(3/8)			
	OD(Outside)	mm	21.5	21.5			
	OD(Outside)	inch	0.85	0.85			
Refrigerant	Type	Rated	g/m	20	20		
		Rated	W	43	43		
		Rated	W	43	43		
Fan Motor Output	Compressor Type	Rated	kg	34	34		
		Rated	kg	34	34		
		Rated	mm	770545288	770545288		


INDOOR UNIT - ASUW096NRR0 / ANUW126NRR0

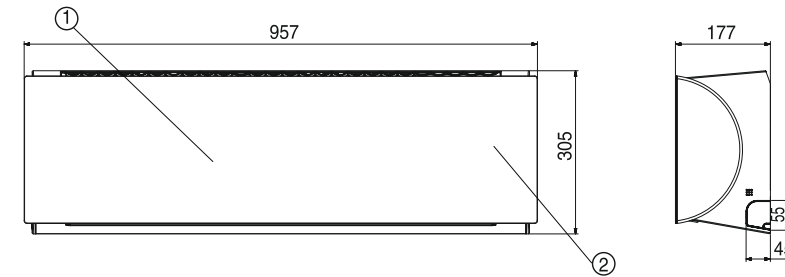

(Unit: mm)

Item No.	Part Name	Remark
1	Front Panel	
2	Display & Signal Receiver	

OUTDOOR UNIT - ASUW096NRR0 / ANUW126NRR0

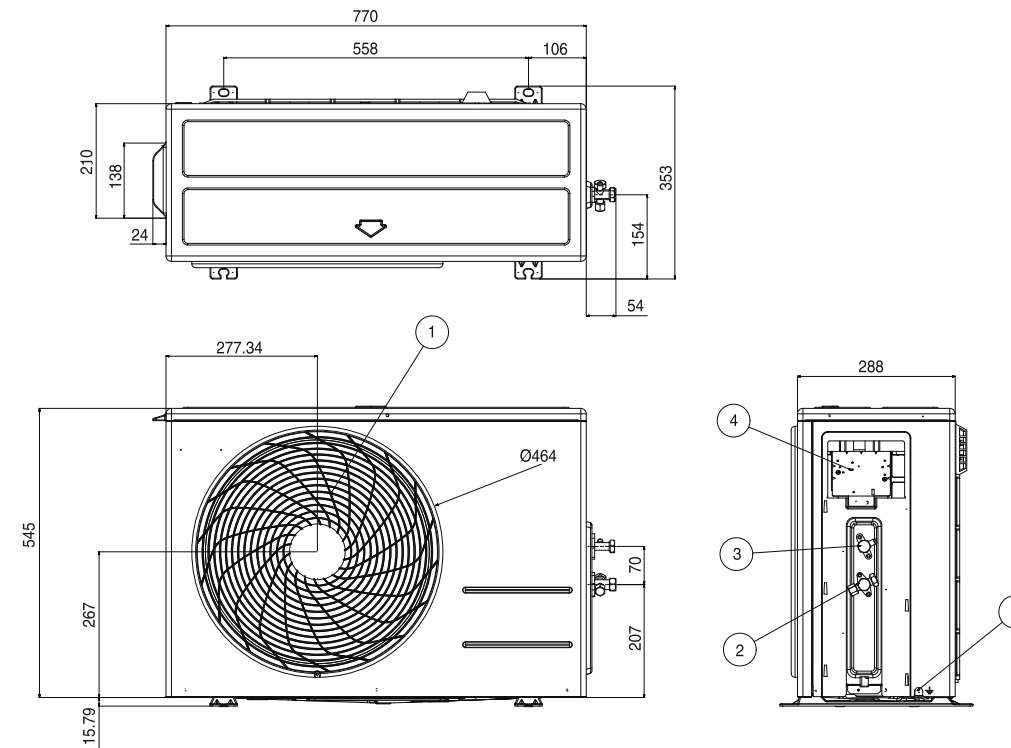

(Unit: mm)

Item No.	Part Name
1	Air Discharge Grille
2	Gas Pipe Connection Port
3	Liquid Pipe Connection Port
4	Control Box
5	Earth Screw