


# ARTCOOL Stylist

## INVERTER V

9K  
G09WL


12K  
G12WL



P 24 P 15 P 15 P 31 P 31 P 34

Unit				9K	12K	
Model Outdoor Unit				G09WL ASUW0963WB0	G12WL ASUW1263WB0	
Model Indoor Unit				G09WL ASNW0963WB0	G12WL ASNW1263WB0	
<b>Indoor Unit</b>						
Capacity	Cooling	Min	W	1300	1300	
		Rated	W	2500	3500	
		Max	W	3500	4000	
	Heating	Min	W	1300	1300	
		Rated	W	3000	3500	
		Max	W	4200	5000	
Heating -7°C	Rated	W	690	1090		
	Rated	W	830	970		
	Rated	W	3200	3700		
Power Input	Cooling	Rated	W	830	970	
	Heating +7°C	Rated	W	3200	3700	
		W/W		3.61	3.21	
EER				5.70	5.60	
S.E.E.R.				2.50	3.50	
P design C			kW	3.61	3.61	
COP			W/W	3.80	3.80	
S.C.O.P.				2.70	3.30	
P design H			Kw	5.7	5.6	
S.E.E.R.				3.8	3.8	
S.C.O.P.				A+	A+	
Energy Label	Cooling			A	A	
	Heating			170	220	
Annual Energy Consumption	Cooling		kWh	1100	1224	
	Heating		kWh	1/220~240/50	1/220~240/50	
Power Supply			/ V Hz			
Sound Pressure	Cooling	Sleep	dBA	19	19	
			Low	dBA	29	29
			Medium	dBA	34	34
		High	dBA	39	39	
		Heating	Low	dBA	32	32
			Medium	dBA	35	35
	High		dBA	39	39	
Sound Power	Cooling	High	dBA	60	60	
Air Flow Rate	Cooling	Max (Power)	m3/min	10.5	10.5	
Air Flow Rate	Cooling	Sleep	m3/min	4.5	4.5	
		Low	m3/min	6.0	6.0	
		Medium	m3/min	7.0	7.0	
		High	m3/min	8.0	8.0	
		Heating	Low	m3/min	6.6	6.6
			Medium	m3/min	7.5	7.5
	High		m3/min	8.5	8.5	
	Dehumidification Rate			l/h	1.2	1.5
	Running Current	Cooling	Rated	A	4	5
			Max	A	6.0	6.0
			Rated	A	4	4.5
		Heating	Max	A	7.0	7.0
Rated			A	4	4.5	
Rated			A	4	4.5	
Starting Current	Cooling	Rated	A	4	5	
	Heating	Rated	A	4	4.5	
Circuit Breaker			A	15	15	
Power Supply Cable			N x mm <sup>2</sup>	31.0	31.0	
Power & Transmission Cable			N x mm <sup>2</sup>	41.0(Including Earth)	41.0(Including Earth)	
Dimension			mm	645x645x121	645x645x121	
Net Weight			kg	18	18	
Fan Motor Output			W	24	24	
<b>Outdoor Unit</b>						
Operation Range	Cooling	Min~Max	°CDB	-10~48	-10~48	
	Heating	Min~Max	°CWB	-15~24	-15~24	
Sound Pressure	Cooling	High	dBA	45	45	
	Heating	High	dBA	45	45	
	Cooling	High	dBA	65	65	
Sound Power	Cooling	High	dBA	33	33	
Air Flow Rate	Cooling	High	m3/min	-	-	
Piping	Length (Odu/Idu)	Min	m	15	15	
		Max	m	7	7	
		Elevation (Odu/Idu)	m	6.35	6.35	
Piping Connection	Liquid	OD(Outside)	mm	1/4	1/4	
		OD(Outside)	mm	9.52	9.52	
		OD(Outside)	inch	3/8	3/8	
	Gas	OD(Outside)	mm	21.5	21.5	
		OD(Outside)	mm	0.85	0.85	
		OD(Outside)	inch	R410a	R410a	
Refrigerant	Type			1000	1000	
	Charge at 7.5m		g	20	20	
Fan Motor Output	Additional charge		g/m	43	43	
	Compressor Type		W	Rotary	Rotary	
Net Weight			kg	34	34	
Dimension			mm	770 x 545 x 288	770 x 545 x 288	


### INDOOR UNIT - AS-W0963WB0 / AS-W1263WB0

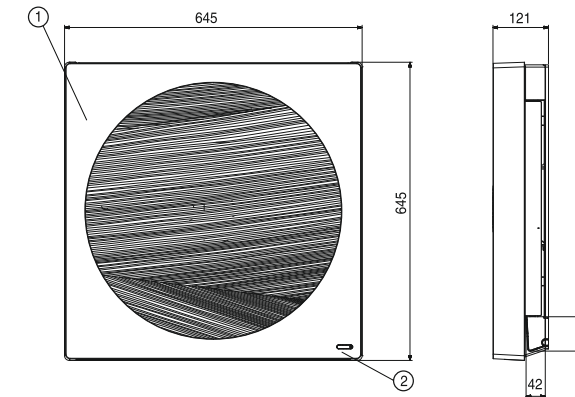

(Unit: mm)

Item No.	Part Name	Remark
1	Front Panel	
2	Display & Signal Receiver	

### OUTDOOR UNIT - ASUW0963WB0 / ASUW1263WB0

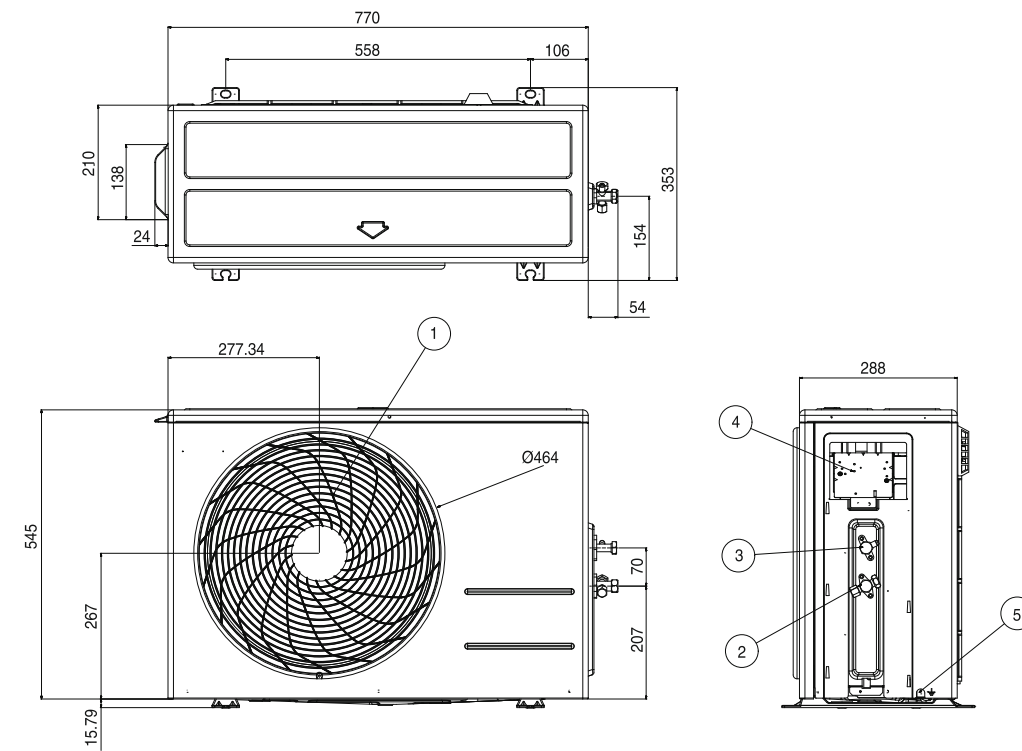

(Unit: mm)

Item No.	Part Name
1	Air Discharge Grille
2	Gas Pipe Connection Port
3	Liquid Pipe Connection Port
4	Control Box
5	Earth Screw